



## **2HCR** 2 HEAD CORNER ROUNDING SEMI-AUTOMATIC COVER CORNER ROUNDING UNIT


Sturdily built, easy adjusting. The machine will meet with the needs of the small and medium production.

### • Advantages


- Simplicity of Operation
- Quick and Easy Makeready
- Easily Moveable
- Reduced Floor Space

### • Operation

Covers are insert manually into the corner rounding station. In two passages the machinery allows the perfect rounding of the sides of the 4 corners. The unit is equipped with the heating system which soften the glue before the corners will be rounded. Corner pressure time can be adjusted by simply operating on the display.

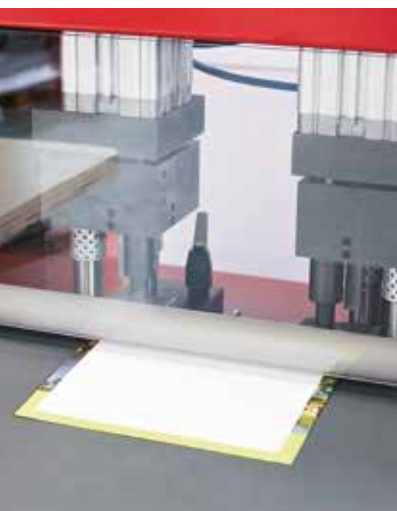

◀ Dimensions

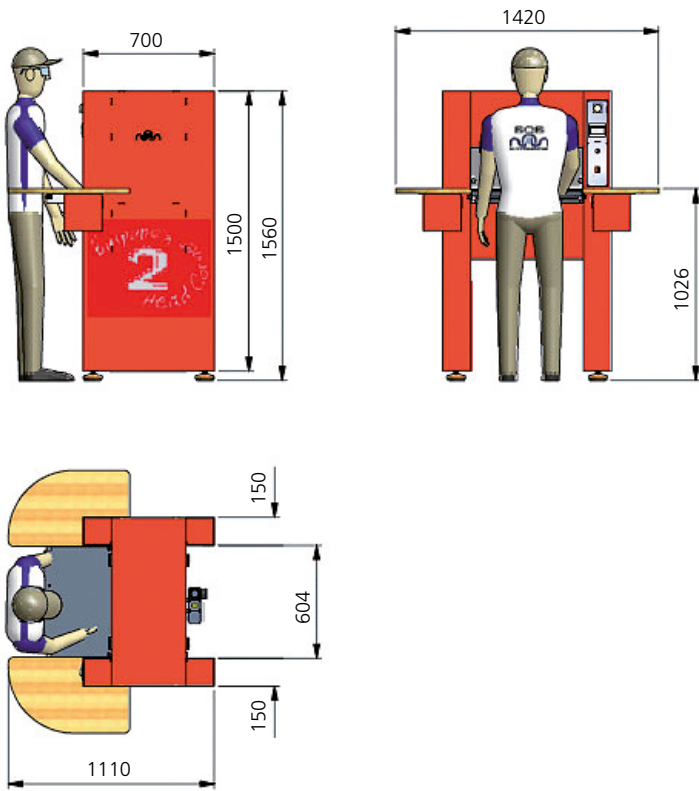

## 2 HEAD CORNER ROUNDING

Open Cover Size	standard maximum (width x height)	600 x 570 mm
	minimum (width x height)	143 x 92 mm
Supply voltage		230 V / 1 ph / 50 Hz
Installed Power		0.5 kW
Compressed Air Requirement		0.5 ltr/cycle at 6 bar
Weight		200 kg
Dimensions (L x W x H)		1,420 x 1,110 x 1,560 mm

Technical data subject to change without notice

◀ Technical data




GROOVED




FLAT

Standard cover corner rounding radii

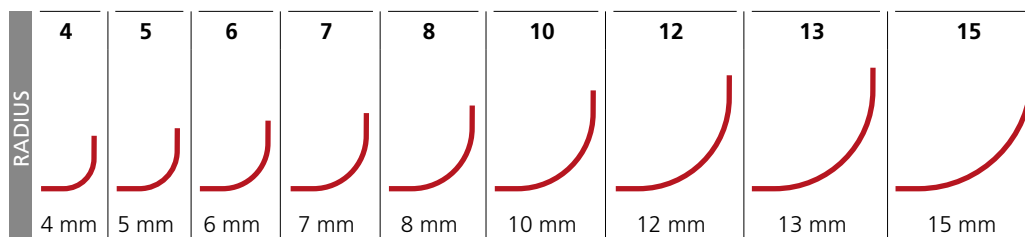

◀ Tools



SCS-2HCR-UK Rev.0516



**SCS Automaberg Srl**  
 Via Maestri del Lavoro, 33  
 24060 Brusaporto (Bg) Italy  
 Tel: +39 035 682480  
 Fax: +39 035 686029  
 info@scsautomaberg.com  
 www.scsautomaberg.com