



HCR HEAD CORNER ROUNDING TABLE CORNER ROUNDING UNIT


Table corner rounding unit with one punch only. Sturdily built, easy adjusting. Just insert the cover, the punching tool comes down and allows the perfect rounding of the corner. Ideal for the small production.


• Advantages

- Simplicity of operation
- Reduced space

• Operation

Cover is insert manually and 2 sensors will allow the corner rounding starting. The heating resistance in the punch will soften the glue before the corner will be rounded, raising a perfect result. The temperature is adjustable and can be excluded. A pressing time potentiometer allows to establish the pressing time.

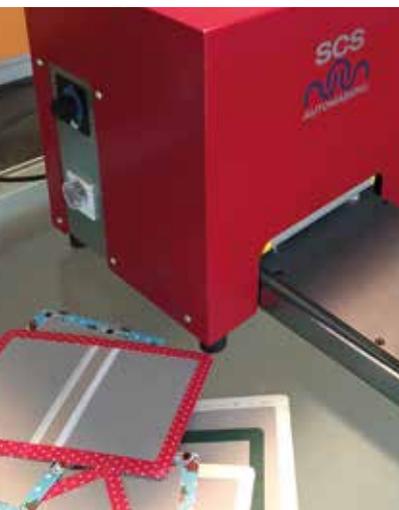

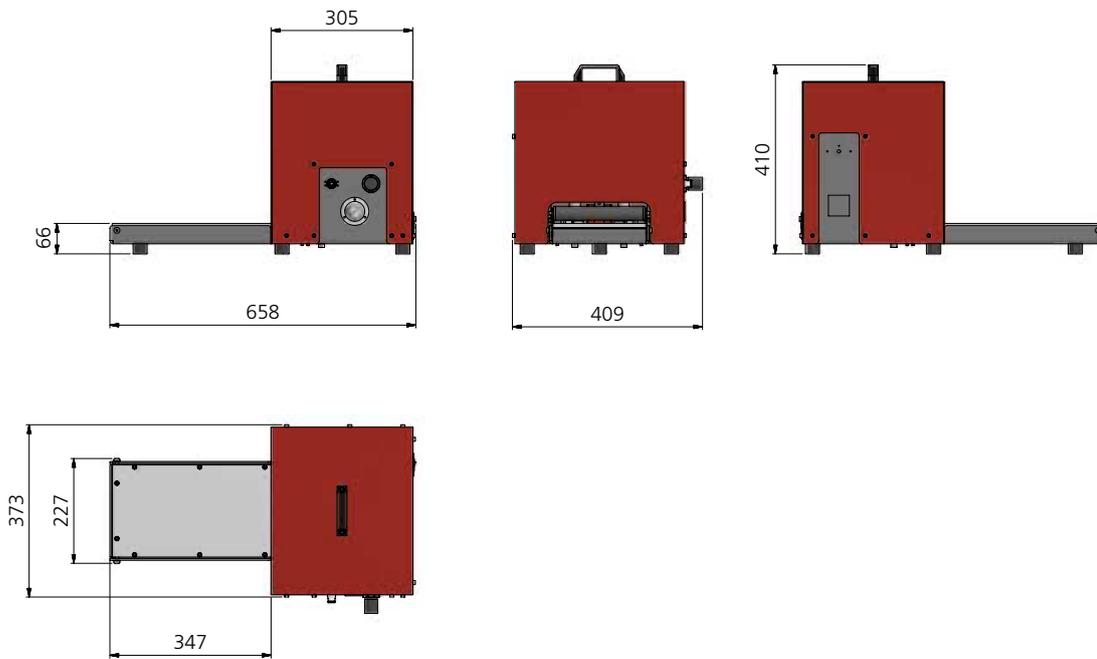


HEAD CORNER ROUNDING

Supply voltage	230 V / 1 ph / 50 Hz
Installed power	0.3 kW
Compressed air requirement	0.3 ltr/cycle at 6 bar
Weight	30 kg
Dimensions (WxLxH)	400 x 650 x 375 mm

Technical data subject to change without notice




GROOVED



FLAT

Standard cover corner rounding radii

	4	5	6	7	8	10	12	13	15
RADIUS									
	4 mm	5 mm	6 mm	7 mm	8 mm	10 mm	12 mm	13 mm	15 mm



SCS-HCR-UK Rev. 1016



SCS Automaberg Srl
 Via Maestri del Lavoro, 33
 24060 Brusaporto (Bg) Italy
 Tel: +39 035 682480
 Fax: +39 035 686029
 info@scsautomaberg.com
 www.scsautomaberg.com